


Interfaces

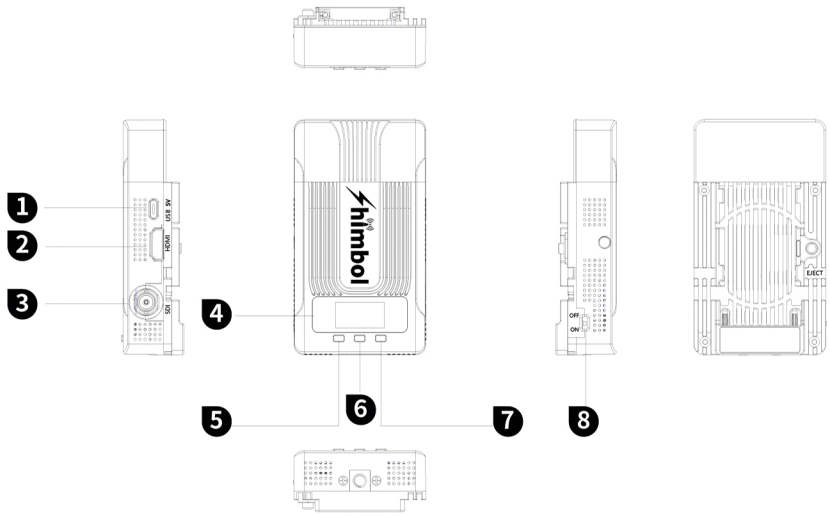

- 1** USB-C Port
- 2** HDMI Input(TX)/ Output(RX)
- 3** SDI Input(TX)/ Output(RX)
- 4** OLED Display screen
- 5** Direction button
- 6** Menu button
- 7** Direction button
- 8** Power switch

Parameters

	Transmitter	Receiver
Interface	HDMI Input/SDI Input	HDMI Output/SDI Output
Powered By	5V DC/NP-F Battery	5V DC/NP-F Battery
Power consumption	<4.5W	<3W
HDMI Input	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz	/
HDMI Output	/	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz
SDI Input	720P@50/60Hz 1080I@50/59.94/60Hz 1080P@23.98/24/25/29.97/30 50/59.94/60Hz 1080PSF23.98/24/25/29.97/30Hz	
SDI Output		720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz
Weight	160g	160g
Size	113*63.5*20.5mm	113*63.5*20.5mm
Transmission frequency band	5GHz	
Transmit power	21dBmMAX	
Transmission delay	80ms, Noisy RF environment 120ms typical	
Receiving sensitivity	-80dBm	